

Features

- No degrade after multiple surge events.
- Low over shoot voltage
- Fail short if surge rating over specification
- Plastic package is flammability rated V-0 per UL-94
- IEC61000-4-2 +/-30kV both contact and air
- IEC61000-4-4 50A(5/50ns)


RoHS
Compliant



Applications

SMA TSS is designed to protect baseband equipment such as phones, faxes, modems, line cards, CPE and DSL from damaging overvoltage transients. Also it is widely used on surveillance CVBS port surge protection.

Function Diagram



Characteristics (T = 25°C unless otherwise noted)

| Part Number | Marking | V _{DRM} @5uA (Volts) Min | V _S @100V/uS (Volts) Max | I _H (mA) Min | I _S (mA) Max | I _T (A) Max | V _T @ I _T =2A | Capacitance (pF) 21MHz, 2V bias Min Max | |
|-----------------|---------|-----------------------------------------|-------------------------------------------|-------------------------------|-------------------------------|------------------------------|-------------------------------------|--------------------------------------------------|-----|
| P0080S1BLRP | P-8B | 6 | 25 | 50 | 800 | 2.2 | 4 | 20 | 35 |
| P0080S1BLRP-LVs | P8BL | 6.5 | 13 | 20 | 800 | 2.2 | 4 | 20 | 35 |
| P0220S1BLRP | P2BB | 22 | 30 | 50 | 800 | 2.2 | 4 | 40 | 100 |
| P0300S1BLRP | P03B | 25 | 40 | 50 | 800 | 2.2 | 4 | 40 | 100 |

Surge Ratings

| Series | I _{PP} | | | | | | | | | I _{TSM} 50/60 Hz | di/dt |
|--------|----------------------|-------------------|---------------------|---------------------|---------------------|--------------------|---------------------|----------------------|---------------------|------------------------------|-------------|
| | 0.2/310 ¹ | 2/10 ¹ | 8/20 ¹ | 10/160 ¹ | 10/560 ¹ | 5/320 ¹ | 10/360 ¹ | 10/1000 ¹ | 5/310 ¹ | | |
| | 0.5/700 ² | 2/10 ² | 1.2/50 ² | 10/160 ² | 10/560 ² | 9/720 ² | 10/360 ² | 10/1000 ² | 10/700 ² | | |
| | A min | A min | A min | A min | A min | A min | A min | A min | A min | A min | Amps/μs max |
| B | - | 250 | 250 | 90 | 60 | 75 | 75 | 55 | 100 | 25 | 500 |

Notes:


1 Current waveform in μs

2 Voltage waveform in μs

Absolute Maximum Ratings (TA=25°C, unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|--------------------------------------|------------------|-------------|------|
| Storage temperature range | T _{STG} | -60 to +150 | °C |
| Operating junction temperature range | T _J | -40 to +125 | °C |

I-V Curve Characteristics

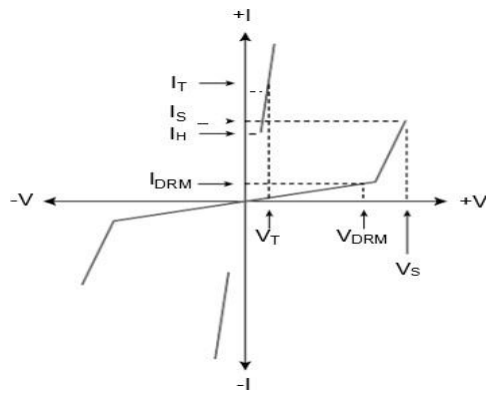

V_{DRM} Stand-off Voltage -- Maximum voltage that can be applied to the TSS without operation




V_S Switch on Voltage -- Maximum voltage that trigger the TSS to on state

V_T Turn on Voltage -- Voltage drop after TSS is triggered on

I_{DRM} Reverse Leakage Current -- Current measured at V_{DRM}

I_S Switch on Current -- Maximum current that trigger the TSS to on state


Ratings and Characteristic Curves (T = 25°C unless otherwise noted)

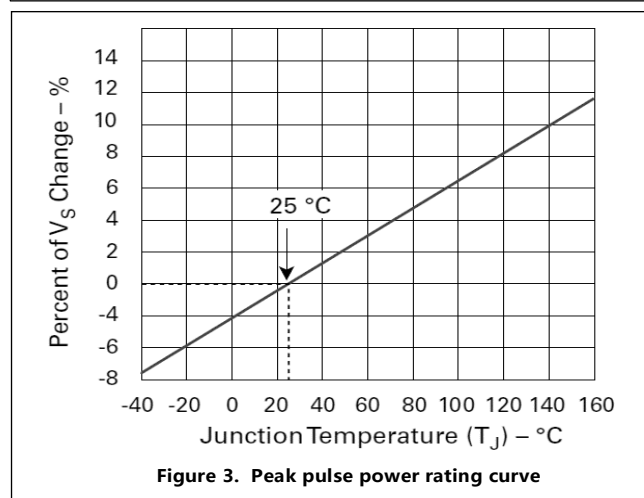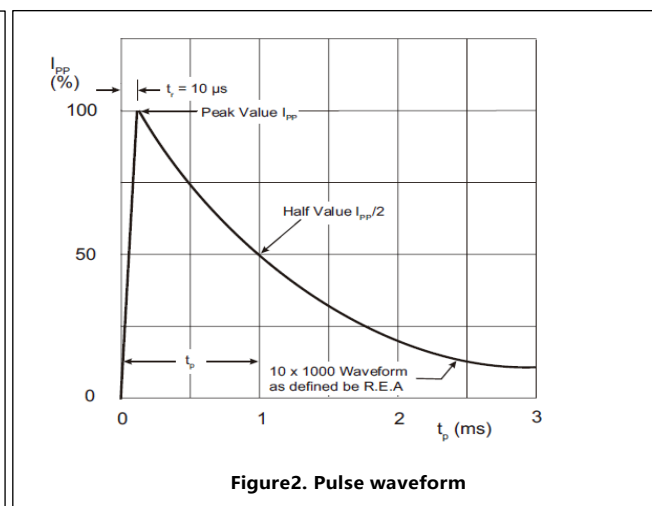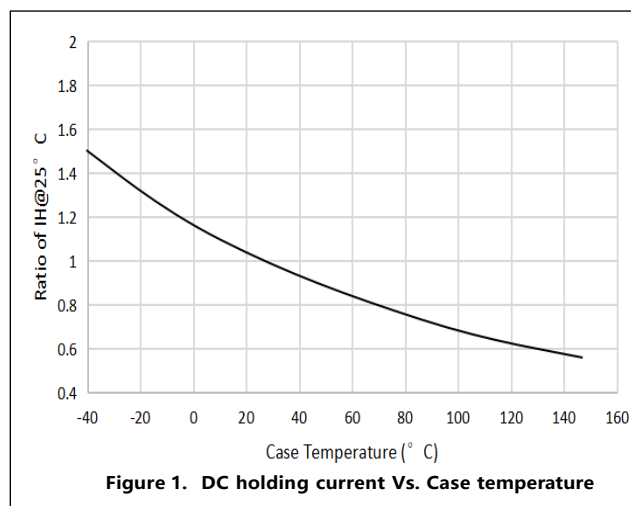


Soldering Parameters

Soldering profile

| | | |
|-------------------------------------------------------|------------------------------------|--------------------|
| Reflow Condition | | Lead-free assembly |
| Pre Heat | - Temperature Min ($T_{S(min)}$) | 150°C |
| | - Temperature Max ($T_{S(max)}$) | 200°C |
| | - Time (min to max) (t_s) | 60 – 180 secs |
| Average ramp up rate (Liquidus Temp (T_A) to peak | | 3°C/second max |
| $T_{S(max)}$ to T_A - Ramp-up Rate | | 3°C/second max |
| Reflow | - Temperature (T_A) (Liquidus) | 217°C |
| | - Time (min to max) (t_s) | 60 – 150 seconds |
| Peak Temperature (T_p) | | 260+0/-5 °C |
| Time within 5°C of actual peak Temperature (t_p) | | 20 – 40 seconds |
| Ramp-down Rate | | 6°C/second max |
| Time 25°C to peak Temperature (T_p) | | 8 minutes Max. |
| Do not exceed | | 260°C |

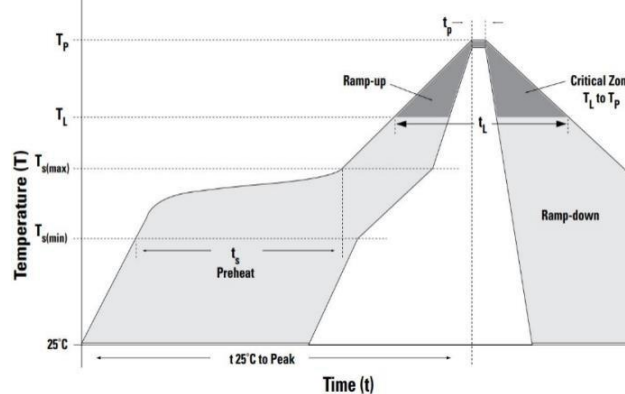


Dimensions

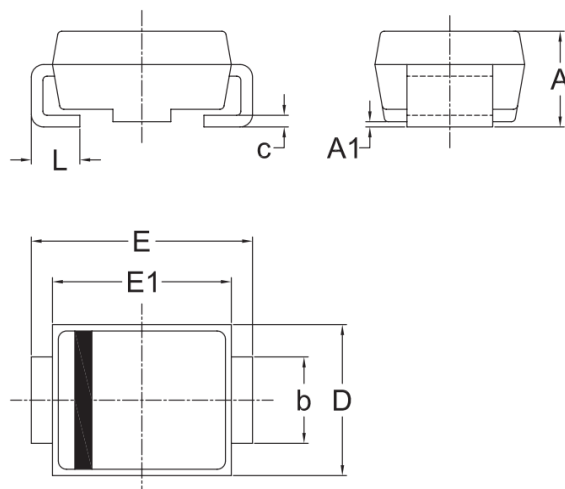


| unit | | A | A1 | b | c | D | E | E1 | L |
|------|----|------|------|------|------|------|------|------|------|
| max | mm | 2.50 | 0.30 | 1.65 | 0.31 | 2.85 | 5.28 | 4.55 | 1.55 |
| min | | 1.90 | 0 | 1.25 | 0.15 | 2.30 | 4.70 | 3.80 | 0.76 |

Part Numbering

P XXXX S1 B L RP-LVs

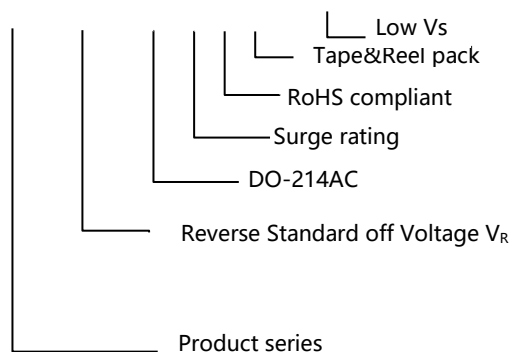


Part Marking



Packing

| Part number | Package name | Small packing quantity | Packing method |
|-------------|--------------|------------------------|----------------|
| PXXXXS1B | DO-214AC | 5000 | Tape & Reel |

Tape and Reel Specification

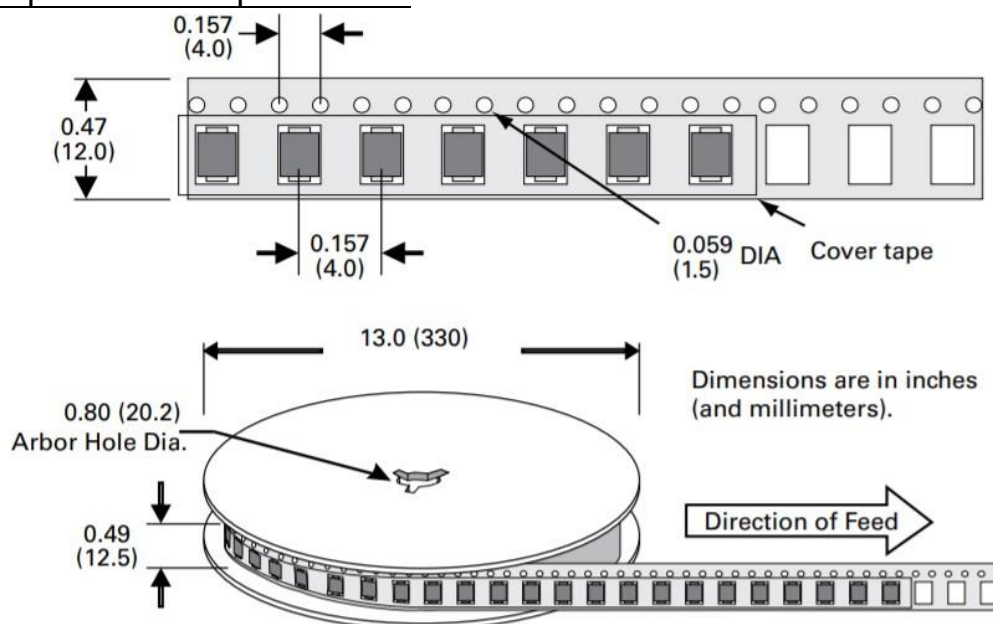

Revision history of Specification

| Version | Change Items | Effective Date |
|---------|---------------------|----------------|
| 1.0 | Initial Release | 14-Oct-2021 |
| 1.1 | Add P0080S1BLRP-LVs | 16-Oct-2021 |
| 1.2 | Update Marking | 10-Jun-2024 |